

AIRCREW CUSTOM-SIZED CLOTHING MEASUREMENT







NAVAIR 10126/1 (4/98)

1. AIRCREW TO BE FITTED	2. SOCIAL SECURITY NO.	3. RANK/GRADE	4. TODAY'S DATE (YYMMDD)
5. COMMAND	6. STATION (E.G. CVN-72, MCAS IWAKUNI, NAS NORFOLK, ETC)	7. DATE NEEDED BY (YYMMDD)	
8. PCS/DEPLOYMENT DATE (YYMMDD)	9. NEXT DUTY STATION	10. REQUISITION NO.	
11. MEASUREMENTS TAKEN BY (PRINT)			12. PHONE NUMBER
13. ITEM REQUESTED	14. QTY	15. FAILSAFE TIGERTEAM SIGNATURE AND DATE (YYMMDD)	

MEASURING INSTRUCTIONS:

- Take measurements using cloth tape, rounding up all measurements to nearest 1/2" inch.
- Measure over underwear, OR over loose, thin shorts and tank top but NOT over spandex (Lycra®).
- Measurements should be taken with BAREFOOT person standing up straight, heels together, arms at sides, and eyes looking straight ahead unless otherwise instructed below.
- Use a full length mirror to make sure tape is lined up in back.

IMPORTANT: NEVER add extra for "ease" or mobility. The patternmaker will add this later.

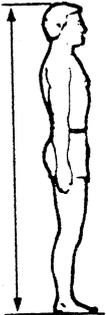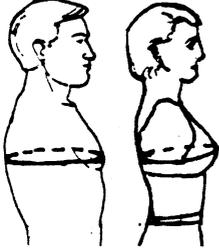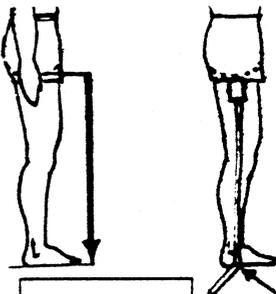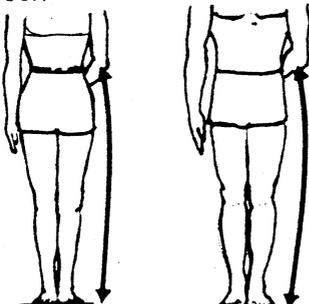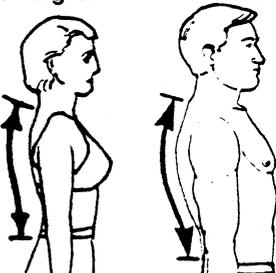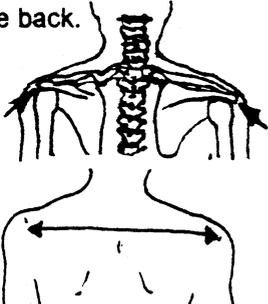
<p>1. WEIGHT (in pounds)</p>  <p>[]</p>	<p>2. HEIGHT: Person should be barefooted, standing with heels together, eyes looking straight ahead.</p>  <p>[]</p>	<p>3. CHEST CIRCUMFERENCE: Measure circumference of fullest part of chest, keeping tape level to the deck all the way around.</p>  <p>[]</p>	<p>4. INSEAM: Assemble the device in Figure 1 (over). Have person position curved edge against groin to the right of genitals). Extend tape straight down to floor and read at floor.</p>  <p>[]</p>
<p>5. OUTSEAM: Start tape at side waistline (top of belt if MAN, bottom of belt if WOMAN). Follow general outline of leg (but not every bump and curve) down to floor.</p>  <p>[]</p>	<p>6. BACK WAIST LENGTH: Mark bony knob on back of neck. Ask person to don a belt at his/her waistline. Measure neck mark to just above belt if MAN, just below belt if WOMAN, following curve of the back.</p>  <p>[]</p>	<p>7. BACK WIDTH: Mark back "corner" of flat-edged left and right shoulder bones. Measure distance between left and right shoulder marks across the back.</p>  <p>[]</p>	<p>FOR OFFICIAL USE ONLY</p>

PRIVACY ACT NOTICE: The social security number is used when necessary to locate PCS personnel. Use of a social security number is authorized by Executive Order 9397.

S/N: 0102-LF-994-2500


8. SLEEVE LENGTH:

Stand in back of person. Mark middle of bony knob at base of neck. On DOMINANT arm, mark wristline with rubberband (see Wrist Circumference below). Measure from neck mark over middle of shoulder ball down to rubberband.

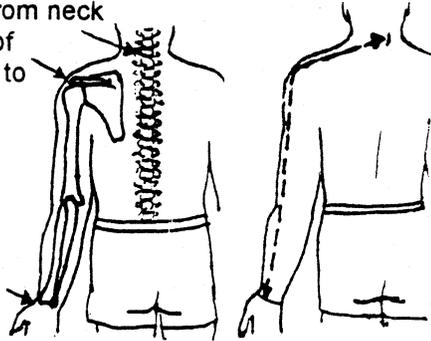


9. SEAT CIRCUMFERENCE:

From side of body, measure circumference of body at fullest part of buttocks, without any compression. Keep tape level to deck all the way around the body.

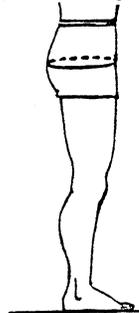


10. BALL OF FOOT CIRCUMFERENCE (for anti-exp. Socks): Measure widest part of DOMINANT foot across ball. Include nearby bunions and corns. Attach tracing of foot to form.

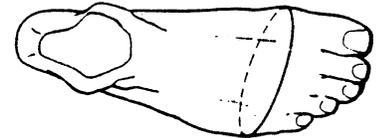


11. WAIST CIRCUMFERENCE:

Measure circumference along waistline (just above belt if MAN, just below belt if WOMAN) without compression. Tape may be tilted front to back.

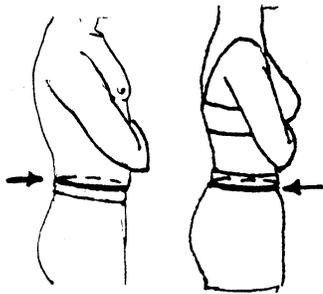

12. WRIST CIRCUMFERENCE (FOR WRIST SEAL):

On DOMINANT wrist, place rubberband at indentations between wrist and hand. Measure circumference just above rubberband.

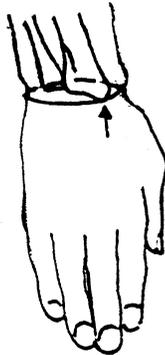

13. NECK CIRCUMFERENCE (FOR NECK SEAL):

Wrap tape at the level of the voicebox ("Adam's apple"). Find by asking person to swallow. Measure circumference.





Figure 1. Inseam Device
a) Using 1/8" thick cardboard, trace and cut out device below.
b) Fasten measuring tape so that 0" is 1/2" above lower edge.

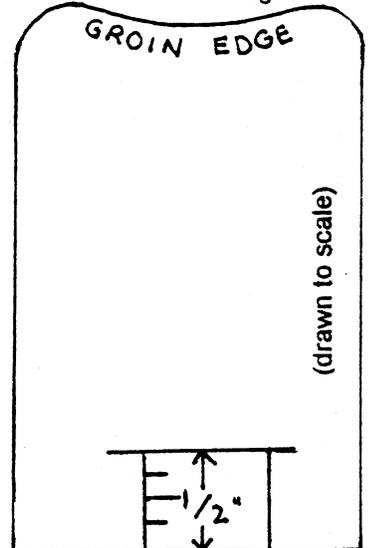

14a. Using a comparison garment, describe the fitting problems (e.g., "crotch 3" too long", etc.) and problem body areas (e.g., "barrel chest", etc.).

14b. IMPORTANT! NSN of Comparison Garment:

15. If a WELL-FITTING garment is available, measure area (e.g., inseam, sleeve length, neck-to-crotch) corresponding to problem in #15. Write here:

FOR OFFICIAL USE ONLY